

PERMIT SITE PLAN

for

WASHINGTON STREET SHERBORN HOMES

at

0 Washington Street in Sherborn, MA

GENERAL NOTES

- ELEVATIONS SHOWN HEREON REFER TO NAVD88.
- TOPOGRAPHIC INFORMATION SHOWN HEREON WAS OBTAINED FROM SAMIOTES CONSULTANTS, INC.
- THE CONTRACTOR SHALL VERIFY THE LOCATION AND RELATIVE ELEVATION OF BENCHMARKS PRIOR TO THE COMMENCEMENT OF ANY CONSTRUCTION. ANY DISCREPANCY SHALL BE REPORTED TO THE ENGINEER.
- ALL SITE CONSTRUCTION SHALL COMPLY WITH THE TOWN OF SHERBORN DEPARTMENT OF PUBLIC WORKS.
- IN CASES WHERE LEDGE, BURIED FOUNDATIONS OR BOULDERS ARE PRESENT, DGT ASSOCIATES SHALL NOT BE RESPONSIBLE FOR THE AMOUNT OF ROCK OR CONCRETE ENCOUNTERED.
- DGT ASSOCIATES SHALL BE NOTIFIED OF ANY SIGNIFICANT DIFFERENCES IN THE EXISTING CONDITIONS OR UTILITIES THAT MAY AFFECT THE CONSTRUCTION SHOWN ON THIS PLAN FOR ANY NECESSARY PLAN REVISIONS.
- THIS PLAN IS NOT INTENDED TO SHOW AN ENGINEERED BUILDING FOUNDATION DESIGN WHICH WOULD INCLUDE DETAILS AND ELEVATIONS FOR FOOTINGS, FOUNDATION WALL DESIGN AND ANY SUBSURFACE DRAINAGE TO PREVENT FLOODING. COORDINATE WITH THE ARCHITECTURAL AND STRUCTURAL PLANS.
- THE PROPOSED BUILDING CONFIGURATION AS SHOWN HEREON SHALL BE CONSIDERED CONCEPTUAL AND SHALL BE VERIFIED WITH THE FINAL ARCHITECTURAL PLANS AND THE CURRENT ZONING ORDINANCES PRIOR TO CONSTRUCTION.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REPAIR AND/OR REPLACEMENT OF ANY EXISTING FEATURES DAMAGED DURING CONSTRUCTION THAT ARE NOT INTENDED FOR DEMOLITION AND/OR REMOVAL HEREON.
- SAFETY MEASURES, CONSTRUCTION METHODS AND CONTROL OF WORK SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.

GRADING AND UTILITY PLAN NOTES

- LOCATIONS OF EXISTING UNDERGROUND UTILITIES SHOWN HEREON ARE APPROXIMATE ONLY. ALL UTILITIES, OBSTRUCTIONS AND/OR SYSTEMS MAY NOT BE SHOWN. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO LOCATE AND PROTECTING ALL EXISTING UNDERGROUND UTILITIES AND/OR SYSTEMS WHETHER OR NOT SHOWN HEREON.
- UNLESS OTHERWISE SHOWN HEREON, ALL NEW UTILITIES SHALL BE UNDERGROUND.
- RIM ELEVATIONS SHOWN HEREON FOR NEW STRUCTURES ARE PROVIDED TO ASSIST THE CONTRACTOR WITH MATERIAL TAKEOFFS. FINAL RIM ELEVATIONS SHALL MATCH PAVEMENT, GRADING, LANDSCAPING, UNLESS SPECIFICALLY INDICATED OTHERWISE.
- WHERE CONNECTIONS AND STRUCTURES ARE TO BE INSTALLED AT EXISTING UTILITIES, THE CONTRACTOR SHALL CONFIRM THE LOCATION AND ELEVATION PRIOR TO INSTALLATION AND SHALL REPORT ANY SIGNIFICANT DISCREPANCY FROM THE PLAN INFORMATION TO THE ENGINEER.
- ACCESSIBLE PARKING SPACES AND ACCESS AISLES SHALL NOT EXCEED A SLOPE OF 1:50 (2%) IN ANY DIRECTION.
- WALKWAY GRADES SHALL NOT HAVE LONGITUDINAL SLOPES IN EXCESS OF 1:20 (5%) OR CROSS SLOPES IN EXCESS OF 1:50 (2%), UNLESS OTHERWISE NOTED.
- WALL GRADIENTS AND CROSS SLOPES SHOWN HEREON ARE WITHIN, OR LESS THAN, THE REQUIREMENTS OF THE MASSACHUSETTS ARCHITECTURAL ACCESS BOARD'S (MAAB) REGULATIONS. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO CONSTRUCT THE WORK SO THAT IT IS COMPLIANT WITH ALL REQUIRED REGULATIONS. NOTE THAT THE MAXIMUM GRADIENTS WITHIN THE REGULATIONS DO NOT RECOGNIZE "CONSTRUCTION TOLERANCES." EXCEEDING THE MAXIMUM GRADIENTS IN THE REGULATIONS IS ENTIRELY AT THE CONTRACTOR'S RISK. THE CONTRACTOR SHALL VERIFY IN WRITING THAT ALL WALKS HAVE BEEN CONSTRUCTED IN COMPLIANCE WITH THE MAAB'S REGULATIONS.
- ALL ACCESSIBLE PARKING SPACES SHALL HAVE SIGNAGE AND MARKINGS COMPLIANT WITH THE MAAB REGULATIONS.
- CURB RADII AND DIMENSIONS SHOWN HEREON ARE AT THE FACE OF CURB.
- WHERE NEW PAVING MEETS EXISTING PAVING, MEET LINE AND GRADE OF EXISTING.
- AT LOCATIONS WHERE EXISTING PAVEMENT MEETS NEW CONSTRUCTION, THE EDGE OF THE EXISTING PAVEMENT SHALL BE SAWCUT TO A CLEAN AND SMOOTH EDGE.
- PERIMETER EROSION CONTROLS SHOWN HEREON SHALL BE INSTALLED PRIOR TO ANY EARTH DISTURBANCE AND SHALL SERVE AS A LIMIT OF WORK, UNLESS OTHERWISE SHOWN.
- THE CONTRACTOR SHALL PROVIDE DUST CONTROL FOR CONSTRUCTION OPERATIONS AS APPROVED BY THE ENGINEER.
- ALL POINTS OF CONSTRUCTION EGRESS OR INGRESS SHALL BE MAINTAINED TO PREVENT THE TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC ROADS.

REGULATORY NOTES

- THE LOCATION OF ALL UNDERGROUND UTILITIES SHOWN HEREON ARE BASED ON FIELD LOCATION OF VISIBLE STRUCTURES AND COMPILED INFORMATION FROM PLANS PROVIDED BY UTILITY COMPANIES AND GOVERNMENT AGENCIES. THE LOCATION SHOWN HEREON SHALL BE CONSIDERED APPROXIMATE. BEFORE ANY CONSTRUCTION, DEMOLITION OR SITE WORK, THE LOCATION OF ALL UNDERGROUND UTILITIES SHALL BE VERIFIED BY THE CONTRACTOR BY CONTACTING "DIG-SAFE" AT 811.
- THE CONTRACTOR SHALL MAKE HIMSELF AWARE OF ALL CONSTRUCTION REQUIREMENTS, CONDITIONS, AND LIMITATIONS IMPOSED BY PERMITS AND APPROVALS ISSUED BY REGULATORY AUTHORITIES PRIOR TO THE COMMENCEMENT OF ANY WORK. CONTRACTOR SHALL COORDINATE AND OBTAIN ALL CONSTRUCTION PERMITS REQUIRED BY REGULATORY AUTHORITIES.
- ALL WORK OUTSIDE OF THE BUILDING THAT IS LESS THAN 10 FEET FROM THE INSIDE FACE OF THE BUILDING FOUNDATIONS SHALL CONFORM WITH THE UNIFORM STATE PLUMBING CODE OF MASSACHUSETTS, 248 CMR.
- CONSTRUCTION ACTIVITIES SHALL CONFORM TO THE RULES AND REGULATIONS OF THE OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA).

SHEET INDEX

C-1	TITLE SHEET
C-2	EROSION AND SEDIMENT CONTROL PLAN
C-3	LAYOUT AND MATERIALS PLAN
C-4	SITE GRADING PLAN
C-5	DRAINAGE PLAN
C-6	SITE UTILITIES PLAN
C-7	EROSION AND SEDIMENT CONTROL NOTES AND DETAILS

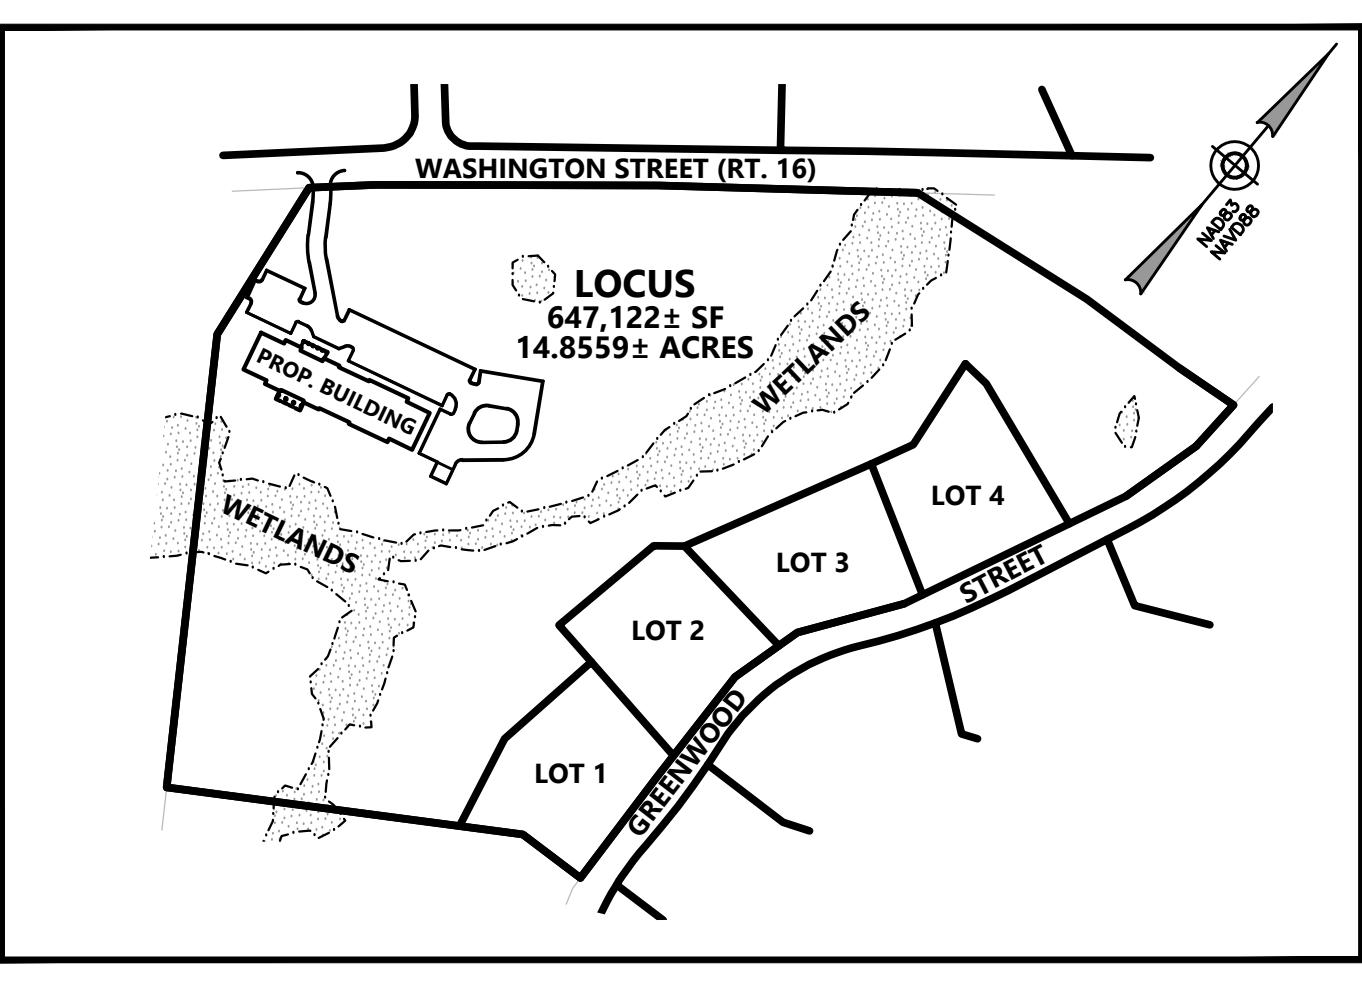


Table 1. Summary of Project Site Conditions

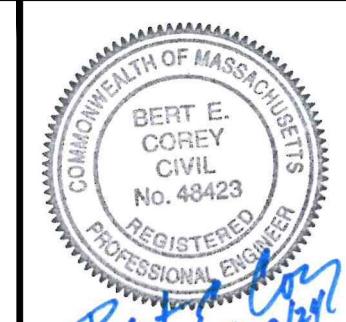
General Site Conditions	Land Condition	Land Breakdown	Acres	Square Feet	Coverage (%)
	Total Area	14.8559	647,122	100.0%	
	Unusable Land	Wetlands	2.5762	112,221	17.3%
	Usable Land	Upland	12.2796	534,901	82.7%
Existing Conditions	Disturbed	Total	0.0000	0	0.0%
	Building		0.0000	0	0.0%
	Impervious	Pavement	0.0000	0	0.0%
		Sidewalk	0.0000	0	0.0%
	Pervious	Lawn (usable open space)	0.0000	0	0.0%
	Undisturbed	Total	14.8559	647,122	100.0%
	Usable Open Space	Upland Woods	12.2796	534,901	82.7%
		Wetlands	2.5762	112,221	17.3%
	Total Usable Open Space	Lawn / Woods	12.2796	534,901	82.7%
Proposed Conditions	Disturbed	Total	2.5493	111,047	17.2%
	Building		0.3323	14,475	2.2%
	Impervious	Pavement	0.6955	30,296	4.7%
		Sidewalk	0.0649	2,826	0.4%
	Pervious	Lawn (usable open space)	1.4566	63,450	9.8%
	Undisturbed	Total	12.3066	536,075	82.8%
	Usable Open Space	Upland Woods	9.7303	423,854	65.5%
		Wetlands	2.5762	112,221	17.3%
	Total Usable Open Space	Lawn / Woods	11.1870	487,304	75.3%

Table 2. Summary of Proposed Building

Item	Total	1 Bedroom	2 Bedroom	3 Bedroom
Units	40	14	22	4
Bedrooms	70	14	44	12

Table 3. Zoning Summary Table (Sherborn Residential B District)


Item	Required	Proposed Conditions	Waiver Required
Minimum Lot Area	2 acres	14.8559 acres	No
Minimum Frontage	200 feet	792.4 feet	No
Minimum Lot Width	200 feet	792.4 feet	No
Minimum Lot Depth	N/A	N/A	N/A
Minimum Front Setback	60 feet	197.7 feet	No
Minimum Side Setback	40 feet	39.0 feet	Yes
Minimum Rear Setback	30 feet	301.8 feet	No
Maximum Height (stories)	2.5 stories	3 stories	Yes
Maximum Height (feet)	35 feet	> 35 feet	Yes
Maximum Lot Coverage	N/A	N/A	N/A
Proposed Surface Cover			
Building Footprint	2.2%		
Parking / Paved Areas	5.1%		
Total Impervious Area	7.3%		
Unusable Open Space (wetlands)	17.3%		
Usable Open Space	75.3%		

PARCEL ID:	MAP 7, LOT 0, BLOCK 49				
ISSUED FOR:	COMPREHENSIVE PERMIT APPLICATION				
 BERT E. COREY CIVIL NO. 49423 REGISTERED PROFESSIONAL ENGINEER BERT E. COREY 1/23/24					
NO. APP.	DATE	DESCRIPTION			
JANUARY 23, 2024					
SCALE:	AS NOTED				
DESIGN:	KMR	DRAFTED:	KMR/JAL	CHECKED:	JAL/BEC
PROJECT TITLE:					

WASHINGTON STREET SHERBORN HOMES


0 WASHINGTON STREET
SHERBORN, MASSACHUSETTS 01770

TITLE SHEET	
SHEET:	1 OF 7
PROJECT NO.:	F-25902
C-1	

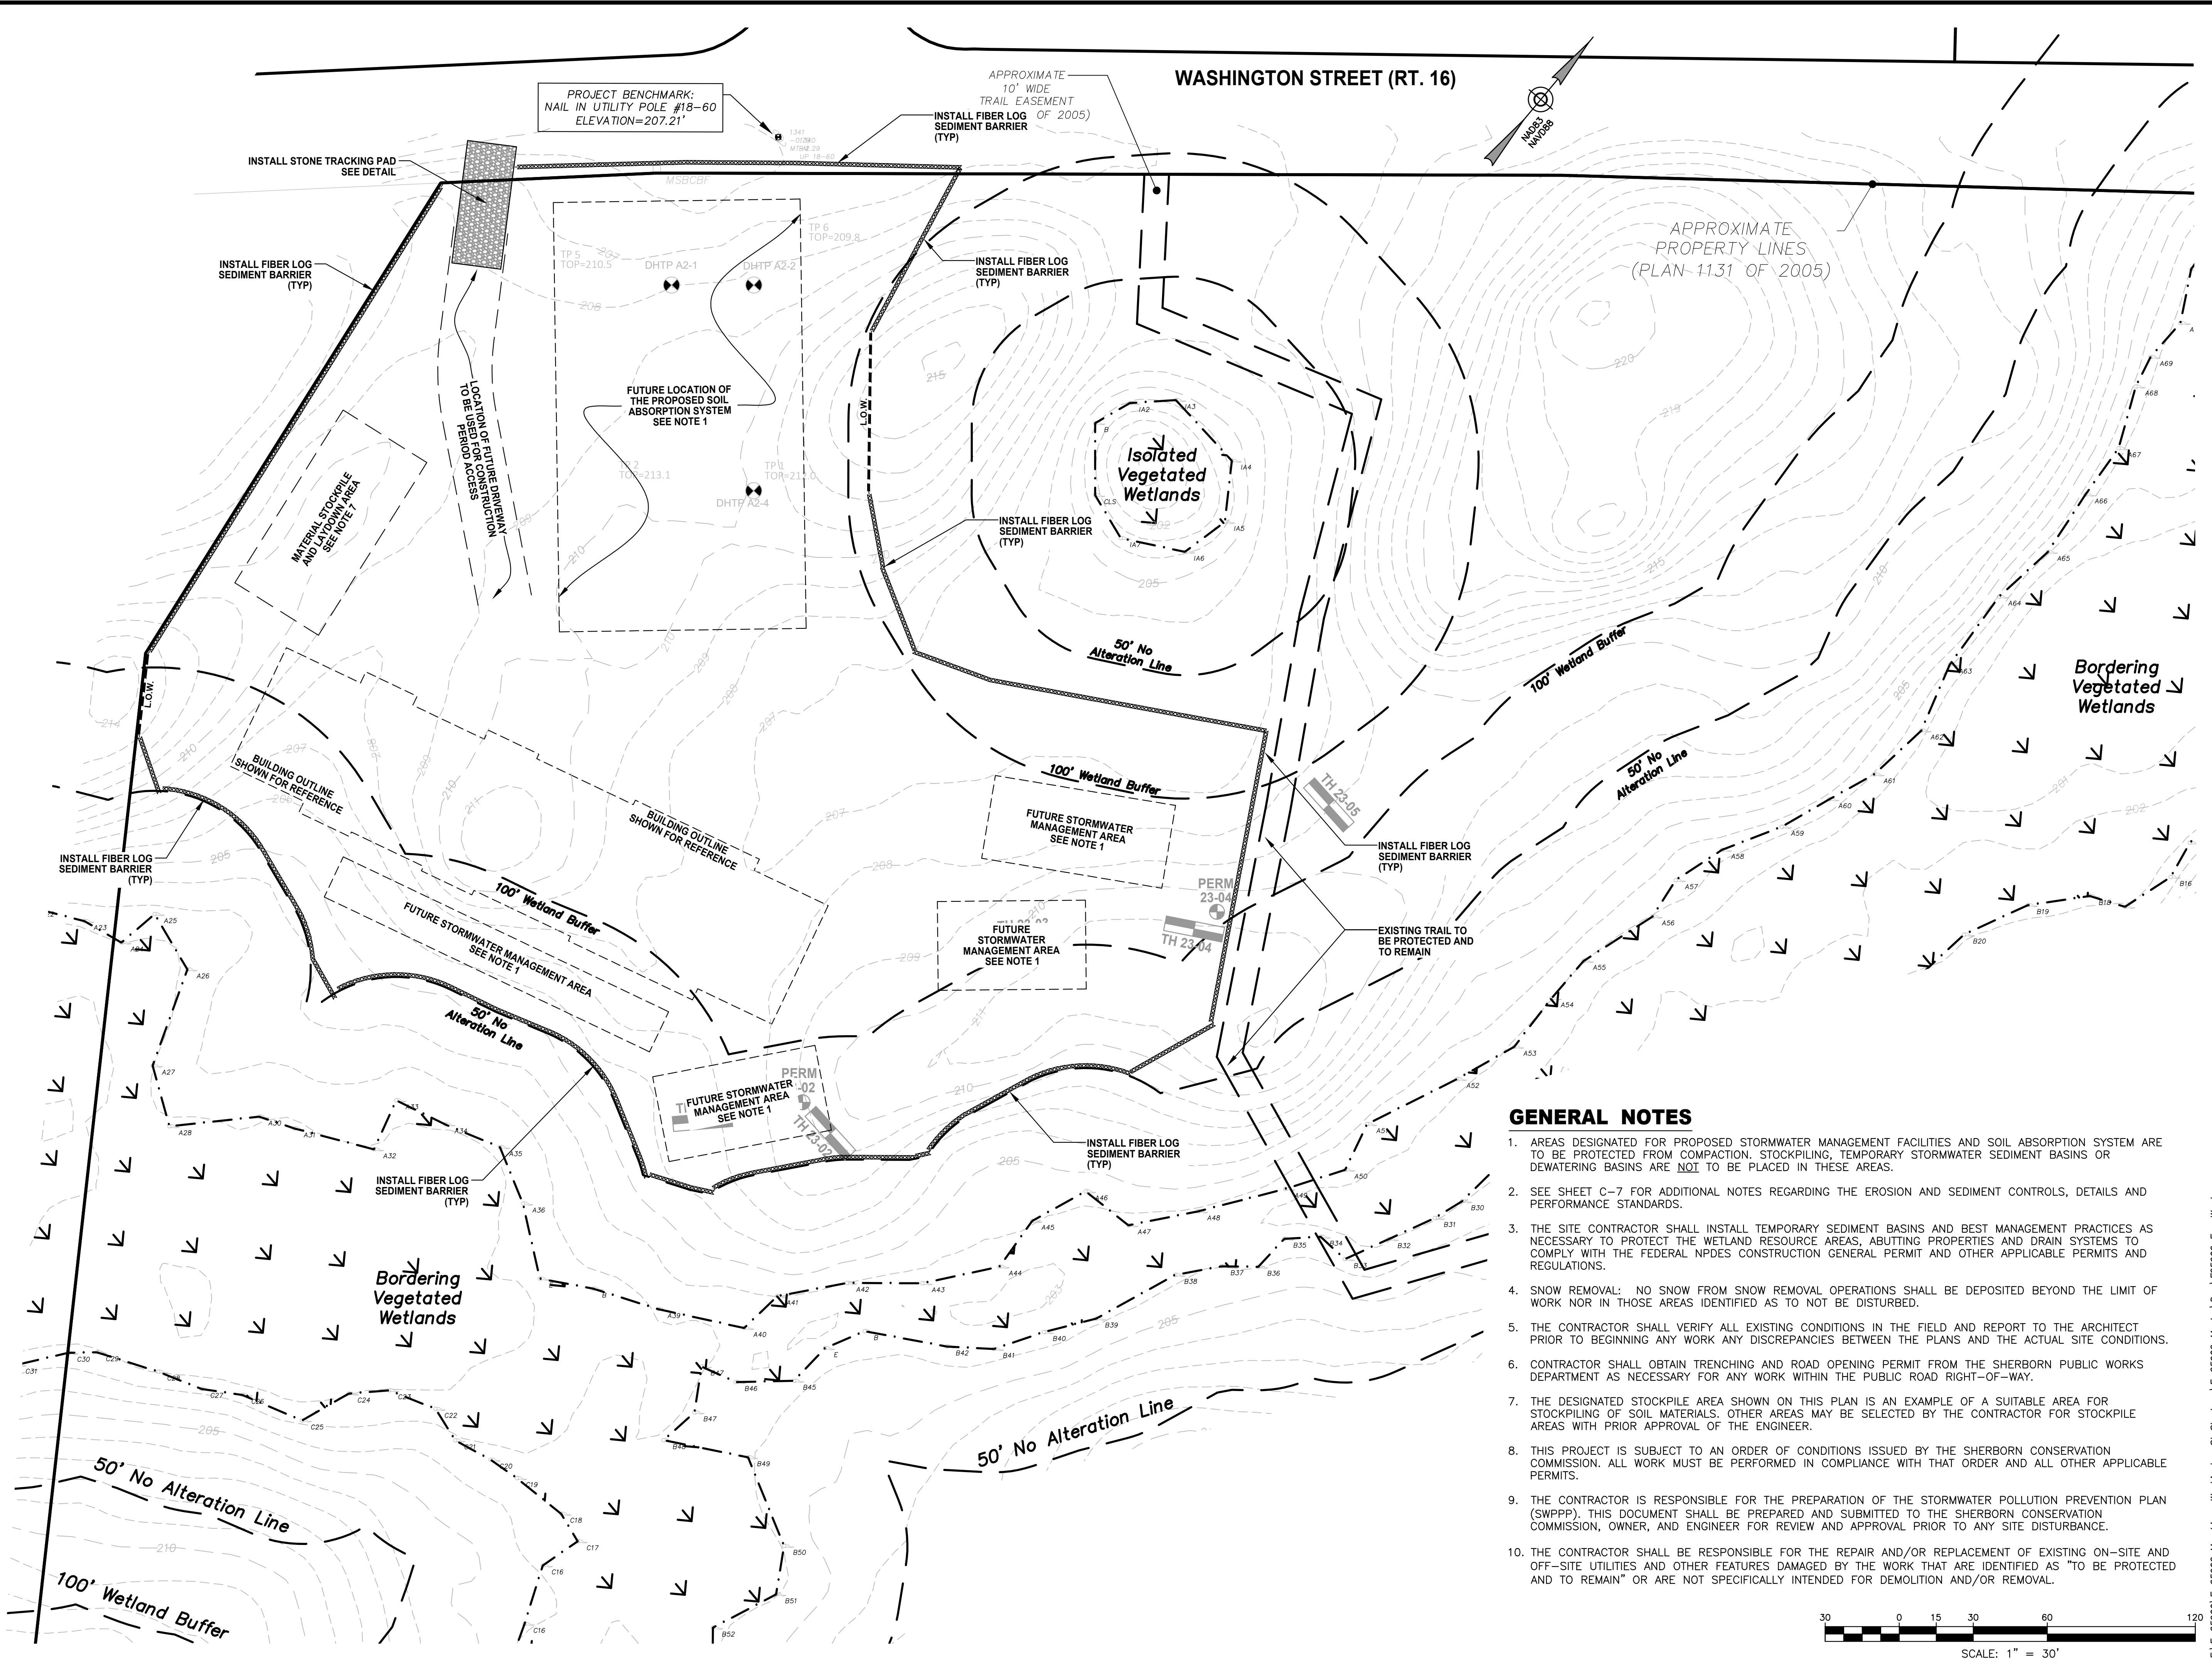

PARCEL ID:

ISSUED FOR:

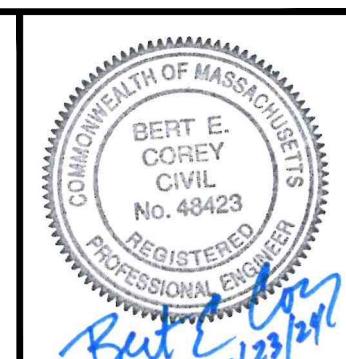

NO.	APP	DATE	DESCRIPTION
-----	-----	------	-------------

DATE: **JANUARY 23, 2024**

SCALE: 1" = 30'

DESIGN: KMR	DRAFTED: KMR/JAL	CHECKED: JAL/BEC
-----------------------	----------------------------	----------------------------

GENERAL NOTES

330

1. AREAS DESIGNATED FOR PROPOSED STORMWATER MANAGEMENT FACILITIES AND SOIL ABSORPTION SYSTEM ARE TO BE PROTECTED FROM COMPACTION. STOCKPILING, TEMPORARY STORMWATER SEDIMENT BASINS OR DEWATERING BASINS ARE NOT TO BE PLACED IN THESE AREAS.
2. SEE SHEET C-7 FOR ADDITIONAL NOTES REGARDING THE EROSION AND SEDIMENT CONTROLS, DETAILS AND PERFORMANCE STANDARDS.
3. THE SITE CONTRACTOR SHALL INSTALL TEMPORARY SEDIMENT BASINS AND BEST MANAGEMENT PRACTICES AS NECESSARY TO PROTECT THE WETLAND RESOURCE AREAS, ABUTTING PROPERTIES AND DRAIN SYSTEMS TO COMPLY WITH THE FEDERAL NPDES CONSTRUCTION GENERAL PERMIT AND OTHER APPLICABLE PERMITS AND REGULATIONS.
4. SNOW REMOVAL: NO SNOW FROM SNOW REMOVAL OPERATIONS SHALL BE DEPOSITED BEYOND THE LIMIT OF WORK NOR IN THOSE AREAS IDENTIFIED AS TO NOT BE DISTURBED.
5. THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS IN THE FIELD AND REPORT TO THE ARCHITECT PRIOR TO BEGINNING ANY WORK ANY DISCREPANCIES BETWEEN THE PLANS AND THE ACTUAL SITE CONDITIONS.
6. CONTRACTOR SHALL OBTAIN TRENCHING AND ROAD OPENING PERMIT FROM THE SHERBORN PUBLIC WORKS DEPARTMENT AS NECESSARY FOR ANY WORK WITHIN THE PUBLIC ROAD RIGHT-OF-WAY.
7. THE DESIGNATED STOCKPILE AREA SHOWN ON THIS PLAN IS AN EXAMPLE OF A SUITABLE AREA FOR STOCKPILING OF SOIL MATERIALS. OTHER AREAS MAY BE SELECTED BY THE CONTRACTOR FOR STOCKPILE AREAS WITH PRIOR APPROVAL OF THE ENGINEER.
8. THIS PROJECT IS SUBJECT TO AN ORDER OF CONDITIONS ISSUED BY THE SHERBORN CONSERVATION COMMISSION. ALL WORK MUST BE PERFORMED IN COMPLIANCE WITH THAT ORDER AND ALL OTHER APPLICABLE PERMITS.
9. THE CONTRACTOR IS RESPONSIBLE FOR THE PREPARATION OF THE STORMWATER POLLUTION PREVENTION PLAN (SWPPP). THIS DOCUMENT SHALL BE PREPARED AND SUBMITTED TO THE SHERBORN CONSERVATION COMMISSION, OWNER, AND ENGINEER FOR REVIEW AND APPROVAL PRIOR TO ANY SITE DISTURBANCE.
10. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REPAIR AND/OR REPLACEMENT OF EXISTING ON-SITE AND OFF-SITE UTILITIES AND OTHER FEATURES DAMAGED BY THE WORK THAT ARE IDENTIFIED AS "TO BE PROTECTED AND TO REMAIN" OR ARE NOT SPECIFICALLY INTENDED FOR DEMOLITION AND/OR REMOVAL.

WASHINGTON STREET SHERBORN HOMES


**0 WASHINGTON STREET
SHERBORN, MASSACHUSETTS 01770**

EROSION AND SEDIMENT CONTROL PLAN

SHEET:
2 OF 7

PROJECT NO.:
F-25902

C-2

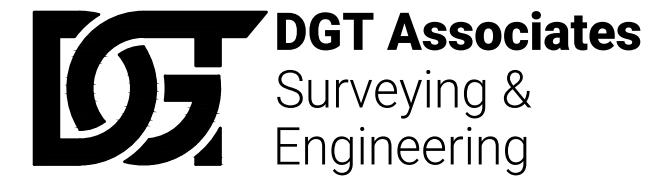

Framingham

Boston • Worcester • Preston, CT

1071 Worcester Road
Framingham, MA 01701
508-879-0030

www.DGTassociates.com

Page 10 of 10

WASHINGTON STREET (RT. 16)

APPROXIMATE —
10' WIDE
TRAIL EASEMENT
(PLAN 1158 OF 2005)

APPROXIMATE
PROPERTY LINES
(PLAN 1131 OF 2005)


This detailed site plan illustrates the layout of a proposed residential building on Washington Street (RT. 16). The plan shows the building footprint, driveway, and surrounding infrastructure. Key features include:

- Proposed Residential Building:** A 3-story building with 40 units, located on a site bounded by CCB (Vertical Granite Curb) and PCC (Precast Concrete Curb).
- Wetland Buffers:** Two 100' wide wetland buffers are shown, one on the west side and one on the east side of the building footprint.
- Soil Absorption System:** A proposed soil absorption system is located in the northwest corner of the building footprint.
- Retaining Walls:** Multiple retaining walls are proposed, including a 20' high wall on the west side and various lower walls along the building footprint.
- Driveway and Walkways:** A driveway leads to the building, with a 5' wide walkway and a 5' wide path. A 5' wide walkway leads to a 3-story entrance plaza.
- Utilities:** Utility poles and a utility box are marked with project benchmarks: Nail in Utility Pole #18-60, Elevation = 207.21'. A proposed utility pole is also shown.
- Property Lines:** Approximate property lines are marked for Lots 2 and 3.
- Wetlands:** Isolated vegetated wetlands are shown in the northeast corner, and bordering vegetated wetlands are shown to the east and south.
- Alteration Lines:** 50' no alteration lines are marked around the building footprint.
- Wells:** Proposed wells are located in the northeast corner of the property.
- Legend:** A legend provides definitions for various symbols used in the plan.
- Parking Data:** A table provides parking data for the proposed building.
- Scale:** A scale bar indicates distances up to 120'.

PARCEL ID:

ISSUED FOR:

**COMPREHENSIVE
PERMIT APPLICATION**

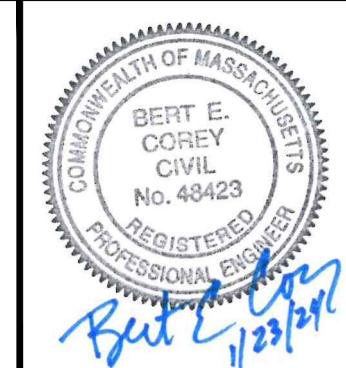

NO.	APP	DATE	DESCRIPTION
-----	-----	------	-------------

DATE: **JANUARY 23, 2024**

SCALE: **1" = 30'**

DESIGN: KMR	DRAFTED: KMR/JAL	CHECKED: JAL/BEC
PROJECT TITLE:		

WASHINGTON STREET SHERBORN HOMES

**0 WASHINGTON STREET
SHERBORN, MASSACHUSETTS 01770**


SHEET TITLE:

AYOUT AND ATERIALS PLAN

SHEET:
3 OF 7

PROJECT NO.:
F-25902

C-3

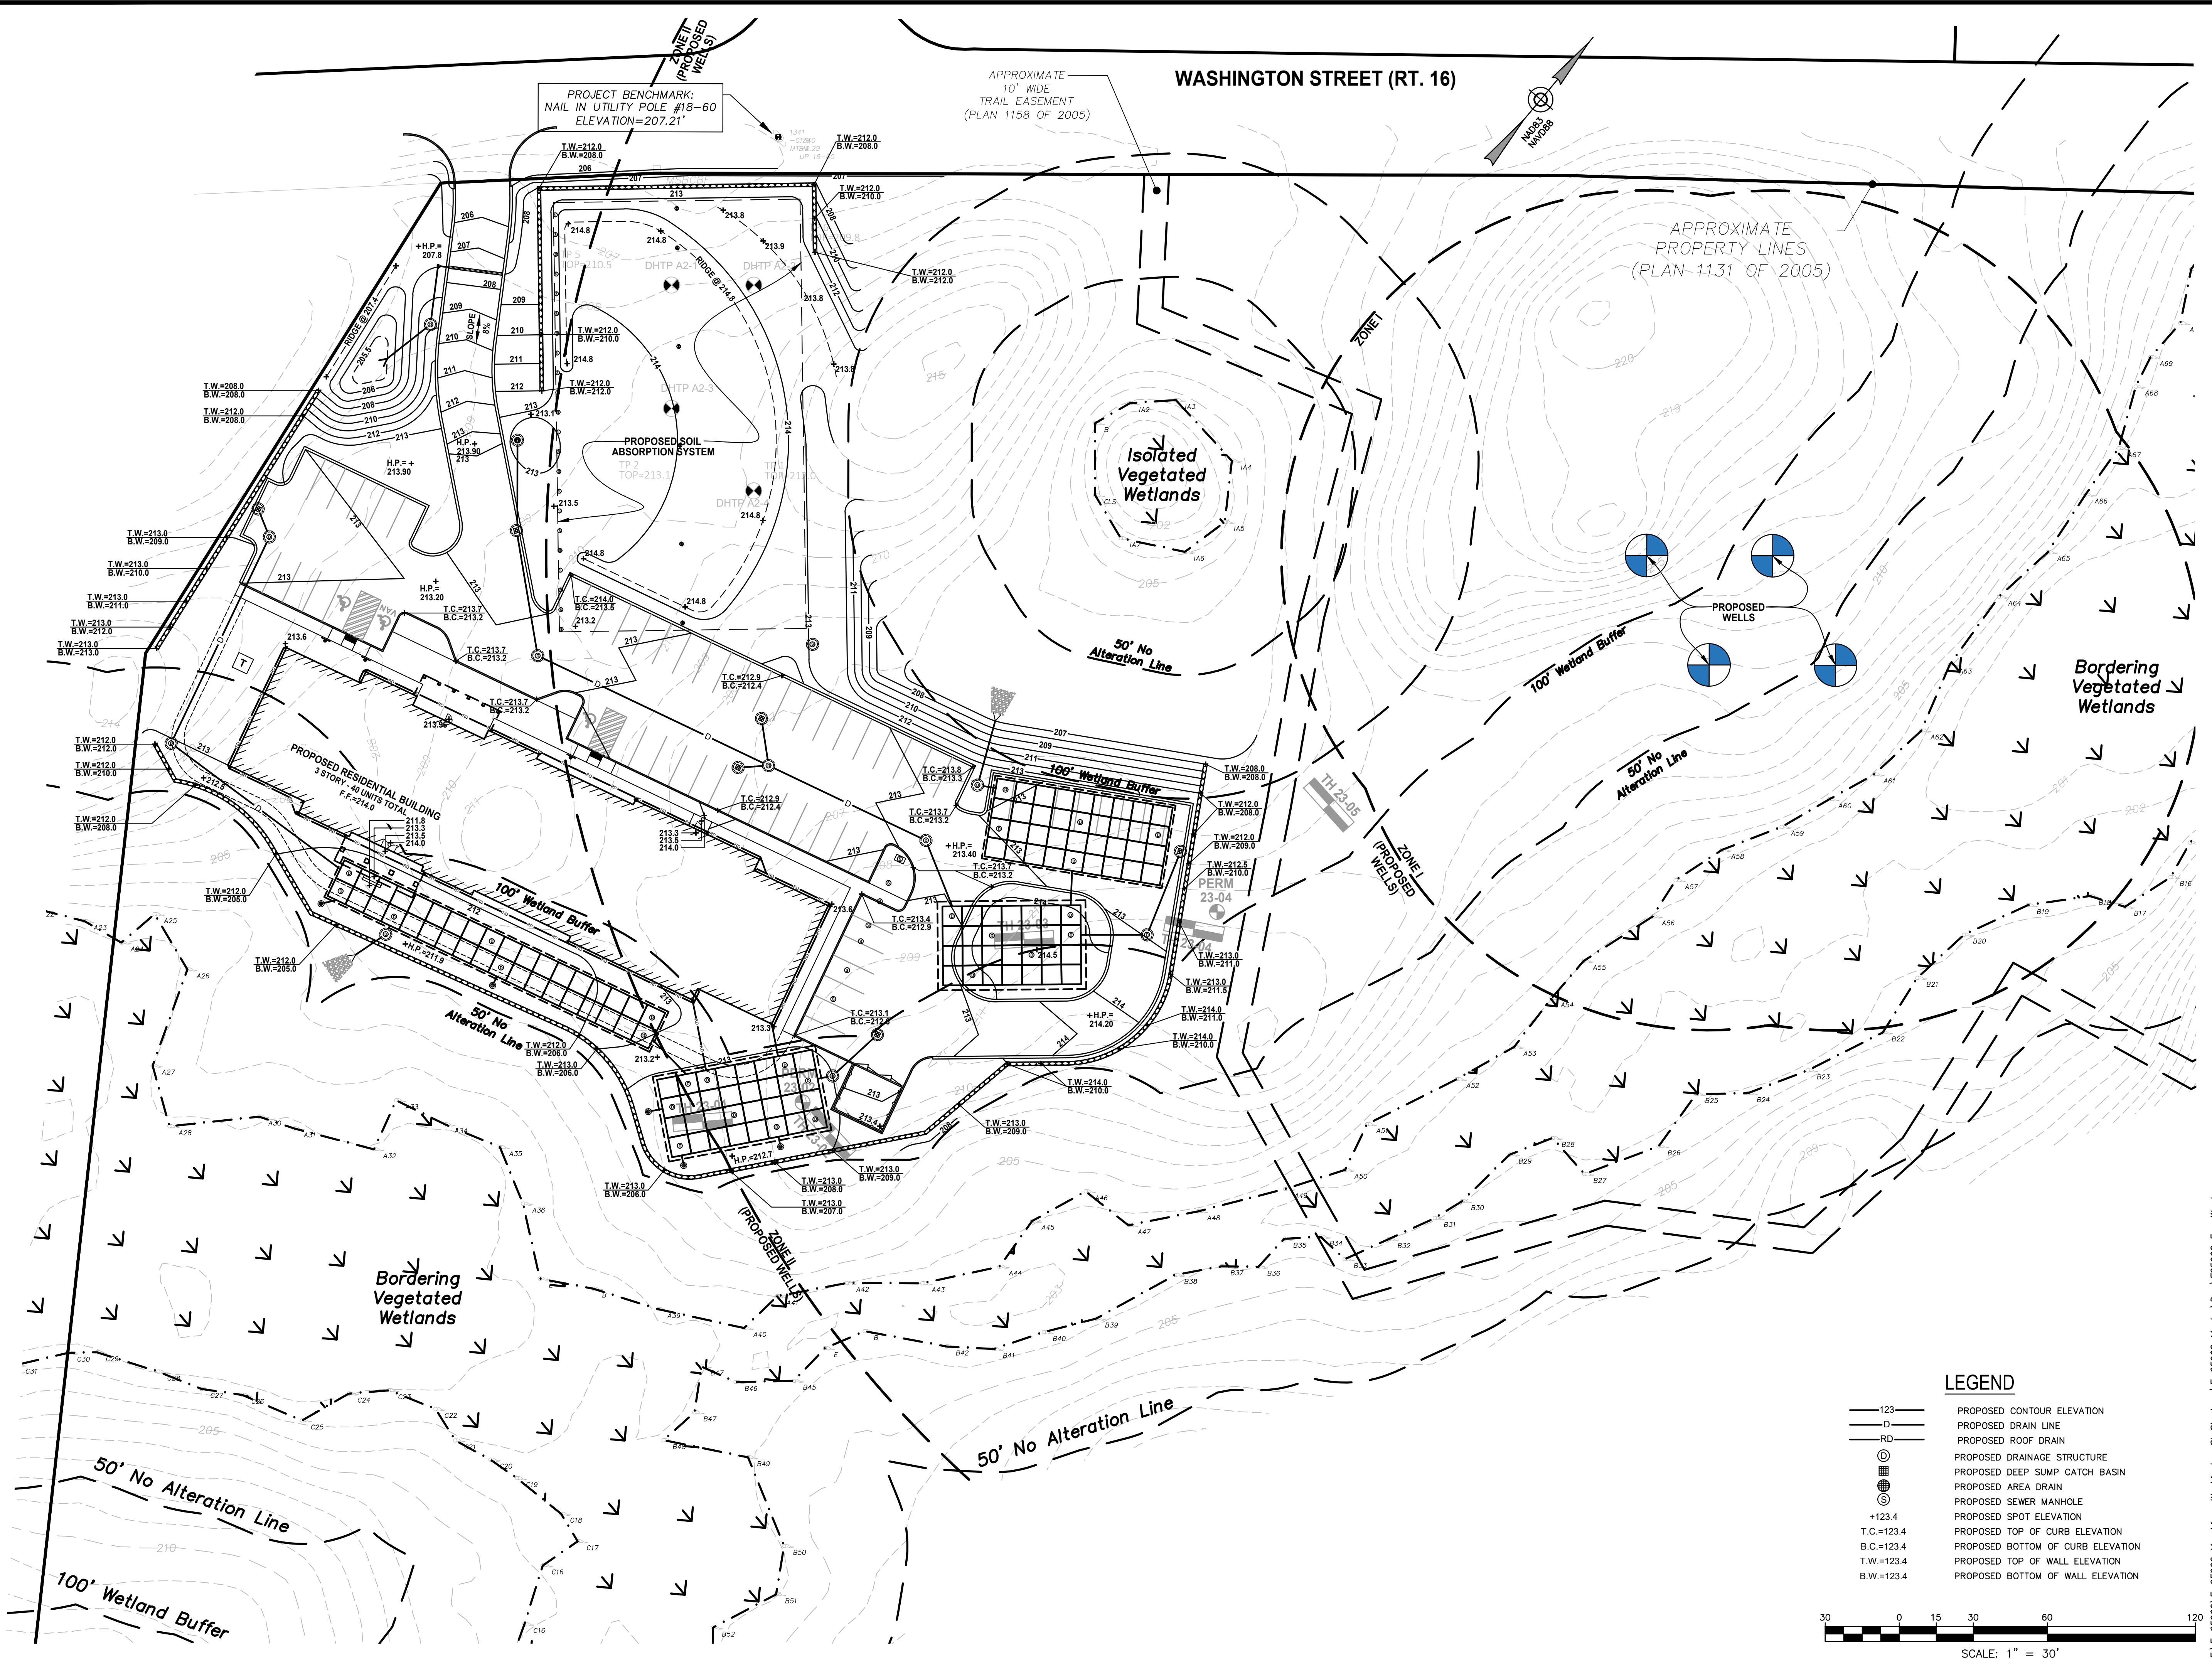

PARCEL ID:

ISSUED FOR:

A circular registration stamp with a serrated outer edge. The text "COMMONWEALTH OF MASSACHUSETTS" is at the top, "BERT E. COREY" is in the center, "CIVIL" is below it, "No. 48423" is to the right, and "REGISTERED PROFESSIONAL ENGINEER" is at the bottom.

NO.	APP	DATE	DESCRIPTION
-----	-----	------	-------------

DATE: **JANUARY 23, 2024**

SCALE: **1" = 30'**

KMR **KMR/JAL** **JAL/BEC**

WASHINGTON

STREET SHERBORN HOMES

**0 WASHINGTON STREET
SHERBORN, MASSACHUSETTS 01770**

SITE GRADING PLAN

SHEET: 4 OF 7	C-4
PROJECT NO.: F-25902	

EROSION AND SEDIMENT CONTROL NOTES

1. CONSTRUCTION PERIOD EROSION AND SEDIMENT CONTROL

1.1 THE PURPOSE OF THE CONSTRUCTION PERIOD EROSION AND SEDIMENT CONTROL PLAN IS TO MINIMIZE THE INTRODUCTION OF SEDIMENTS INTO PUBLIC RIGHT OF WAYS, ABUTTING PROPERTIES, AND TO POST-DEVELOPMENT STORMWATER BMP'S RESULTING FROM THE LAND DISTURBANCE ACTIVITIES DURING CONSTRUCTION.

1.2 INSPECTIONS SHALL BE CONDUCTED BY THE GENERAL CONTRACTOR ON A BI-WEEKLY BASIS (EVERY TWO WEEKS), OR FOLLOWING SIGNIFICANT STORM EVENTS (RAINFALL OF 0.5" OR MORE) THAT CAN AFFECT THE SEDIMENT AND EROSION CONTROL MEASURES IMPLEMENTED ON SITE. THE CONSTRUCTION PERIOD EROSION AND SEDIMENT CONTROL PLAN IS TO MONITOR THE EFFECTIVENESS OF THE CONTROLS AND ANY REQUIRED MAINTENANCE ACTIVITIES. IF AN EROSION/SEDIMENTATION CONTROL MEASURE IS FOUND TO BE INADEQUATE FOR PROPERLY CONTROLLING SEDIMENT, AN ADEQUATE MEASURE SHALL BE DESIGNED AND IMPLEMENTED. A COPY OF THE WRITTEN INSPECTION SHALL BE KEPT ON FILE AT THE CONSTRUCTION SITE.

1.3 DURING CONSTRUCTION, PROPOSED STORMWATER MANAGEMENT STRUCTURES SHALL BE PROTECTED FROM SEDIMENT. ALL PROPOSED NEW STORMWATER MANAGEMENT STRUCTURES THAT INFILTRATE RUNOFF ARE PARTICULARLY SENSITIVE TO DAMAGE BY SEDIMENT. INFILTRATION TECHNOLOGIES ARE NOT DESIGNED TO HANDLE THE HIGH CONCENTRATIONS OF SEDIMENT TYPICALLY FOUND IN CONSTRUCTION RUNOFF, AND MUST BE PROTECTED FROM CONSTRUCTION RELATED SEDIMENT LOADINGS. SITE RUNOFF FROM UNSTABILIZED AREAS SHALL NOT BE DISCHARGED INTO THE PROPOSED INFILTRATION SYSTEMS, TRENCH DRAINS, AND CATCH BASINS UNLESS THE TRIBUTARY DRAFFAGE AREA IS STABLE OR THE RUNOFF IS TREATED TO MEET THE REQUIREMENT OF THE ENGINEER. THE CONTRACTOR SHALL PROVIDE TEMPORARY BY-PASS SYSTEMS AS NECESSARY TO PREVENT CONSTRUCTION SITE RUNOFF FROM ENTERING THE INFILTRATION SYSTEMS. THE INFILTRATION SYSTEMS SHALL REMAIN OFF-LINE AND PROTECTED. CLEAN ROOF RUNOFF MAY DISCHARGE INTO THE INFILTRATION SYSTEMS IF IT IS PIPED DIRECTLY TO THE SYSTEMS AND NOT DIRECTED OVER DISTURBED AREAS.

1.4 NO STOCKPILING IS ALLOWED WITHIN THE FOOTPRINT OF THE PROPOSED INFILTRATION SYSTEMS OR THE FOOTPRINT OF THE PROPOSED SOIL ABSORPTION FIELD. CONTRACTOR IS TO LOCATE THE PROPOSED AREAS FOR THESE SYSTEMS PRIOR TO THE START OF CONSTRUCTION.

1.5 DURING THE INSTALLATION OF THE INFILTRATION SYSTEMS, NO PARKING WILL BE PERMITTED OVER THE SYSTEM UNTIL IT HAS BEEN PROPERLY BACKFILLED AND PROTECTED FROM SEDIMENT AND VEHICULAR LOADS.

1.6 NO PARKING IS ALLOWED OVER THE FOOTPRINT OF THE PROPOSED SOIL ABSORPTION SYSTEM AT ANYTIME DURING THE CONSTRUCTION PROCESS.

2. GENERAL PERFORMANCE STANDARDS:

2.1 THE CONTRACTOR SHALL INSTALL, ROUTINELY INSPECT AND MAINTAIN ALL SEDIMENT AND EROSION CONTROLS SUCH THAT THEY ARE IN PROPER WORKING ORDER AT ALL TIMES DURING THE CONSTRUCTION PROJECT UNTIL SUCH TIME AS ALL AREAS OF THE SITE TRIBUTARY TO THOSE EROSION CONTROLS ARE IN A PERMANENTLY STABILIZED CONDITION.

2.2 THE CONTRACTOR SHALL MANAGE THE SITE SUCH THAT EROSION AND SEDIMENT FROM RUNOFF AND WIND BLOWN DUST ARE CONTROLLED AND MINIMIZED AT ALL TIMES. THE EROSION CONTROLS SHOWN ON THIS PLAN INCLUDE THE INITIAL SETUP OF EROSION CONTROLS AND BASIC INFORMATION, TO MEET THE REQUIREMENT OF BEST MANAGEMENT PRACTICES. THE CONTRACTOR MUST MANAGE THE SITE PROPERLY WHICH MAY INCLUDE, BUT NOT BE LIMITED TO: MINIMIZING AREAS OF EXPOSED SOILS; INSTALLING TEMPORARY COVER; MAKE NECESSARY ADJUSTMENTS TO THE EROSION CONTROL INSTALLATIONS TO IMPROVE FUNCTION; PROVIDE TEMPORARY SEDIMENT BASINS; INSTALL ADDITIONAL EROSION CONTROL WHERE NECESSARY.

2.3 THE EROSION CONTROL WORK SHOWN ON THIS PLAN ARE ALSO SUBJECT TO OTHER STATE AND LOCAL APPROVALS. THE CONTRACTOR SHALL OBTAIN AND BE RESPONSIBLE FOR COMPLIANCE WITH THE CONDITIONS AND REQUIREMENTS OF THOSE PERMITS.

2.4 DESIGN, INSTALLATION AND MAINTENANCE OF SEDIMENT AND EROSION CONTROLS SHALL BE IN ACCORDANCE WITH BEST MANAGEMENT PRACTICES FOLLOWING THE GUIDELINES INCLUDE IN THE FOLLOWING:

- "STORMWATER MANAGEMENT FOR CONSTRUCTION ACTIVITIES, DEVELOPING POLLUTION PREVENTION PLANS AND BEST MANAGEMENT PRACTICES" U.S. ENVIRONMENTAL PROTECTION AGENCY, OCTOBER 1992.
- "MASSACHUSETTS EROSION AND SEDIMENT CONTROL GUIDELINES FOR URBAN AND SUBURBAN AREAS, A GUIDE FOR PLANNERS, DESIGNERS AND MUNICIPAL OFFICIALS", MASS. EXECUTIVE OFFICE OF ENVIRONMENTAL AFFAIRS, MAY 2003.
- U.S.D.A. NATURAL RESOURCES AND CONSERVATION SERVICES (NRCS) GUIDELINES.

3. FEDERAL NPDES PHASE II COMPLIANCE:

3.1 THIS PROJECT IS SUBJECT TO THE FEDERAL CLEAN WATER ACT REQUIREMENTS FOR CONSTRUCTION SITES ADMINISTERED BY THE U.S. ENVIRONMENTAL PROTECTION AGENCY (EPA). THIS PROGRAM IS THE "NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) - PHASE II FOR CONSTRUCTION SITES. FOR COMPLIANCE WITH THIS PROGRAM, THE CONTRACTOR IS RESPONSIBLE FOR PREPARING A CONSTRUCTION POLLUTION PREVENTION PLAN (SWPPP). IN CONFORMANCE WITH CURRENT CONSTRUCTION GENERAL PERMIT AND HAVING A NOTIFICATION OF INTEREST WITH THE EPA UNDER THE NPDES PROGRAM, THE CONTRACTOR SHALL THEN MANAGE THE SITE IN COMPLIANCE WITH THE SWPPP AND IN COMPLIANCE WITH THE CONSTRUCTION GENERAL PERMIT. NOTE THAT THE SWPPP IS TO BE CONSISTENT WITH THIS EROSION AND SEDIMENT CONTROL PLAN AND OTHER APPLICABLE APPROVALS. THE EROSION AND SEDIMENT CONTROL PLAN INCLUDED IN THIS PLAN SET MAY BE USED AS PART OF THE DOCUMENTATION REQUIRED FOR THE PREPARATION OF A SWPPP, BUT IS NOT TO BE CONSIDERED AS MEETING THE FULL REQUIREMENTS OF A SWPPP PREPARED FOR COMPLIANCE WITH THE NPDES PROGRAM.

4. PERIMETER FIBER LOG / SILT FENCING AND LIMIT OF WORK:

4.1 PRIOR TO ANY DISTURBANCE OR ALTERATIONS OF ANY AREA ON THE SITE, AN EROSION CONTROL BARRIER AND CONSTRUCTION FENCE SHALL BE INSTALLED IN THE LOCATIONS SHOWN ON THE PLAN.

4.2 THE STAKED FIBER LOGS ON THE UPSTREAM SIDE OF THE SILT FENCE, AS SHOWN IN THOSE AREAS WHERE THE TOPOGRAPHY REQUIRES THAT STREAMFLOW RUNOFF FROM THE CONSTRUCTION AREA FLOW OVER THE FIBER LOGS, AS NECESSARY, SHALL BE STAKED ON THE UPGRADIENT SIDE OF THE SEDIMENT BARRIER FOR ADDITIONAL FILTRATION AND PROTECTION. THE REQUIRED LOCATIONS FOR THE ADDED FIBER LOG INSTALLATION WILL BE SELECTED BY THE ENGINEER AND / OR THE AUTHORIZED INSPECTOR / SWPPP COORDINATOR UPON COMPLETION OF THE SEDIMENT BARRIER INSTALLATION. (SEE DETAIL).

4.3 ONCE INSTALLED, THE STAKED FIBER LOGS AND CONSTRUCTION FENCE SHALL BE MAINTAINED IN PLACE UNTIL ALL AREAS UPGRADIENT FROM THE BARRIERS HAVE BEEN PERMANENTLY STABILIZED.

4.4 ALL DISTURBED AREAS NOT OTHERWISE DEVELOPED OR WHERE SPECIAL STABILIZATION MEASURES OR LANDSCAPE PLANTINGS ARE PROPOSED SHALL BE LOAMED AND SEDED. SIX INCHES OF LOAM TOPSOIL (MIN. COMPACTED DEPTH) SHALL BE APPLIED UNLESS, OTHERWISE UNLESS, (SEE LANDSCAPE PLAN AND OTHER PLANS AS APPLICABLE).

4.5 THE PERIMETER FIBER LOGS AND CONSTRUCTION FENCE ARE ALSO LIMITS OF WORK. ALL AREAS OUTSIDE THE LIMIT ARE TO BE LEFT UNDISTURBED. DURING THE SITE WORK, ALL PERSONS AND EQUIPMENT SHALL STAY OUT OF THESE AREAS TO PRESERVE THE EXISTING VEGETATION AND SOIL COVER.

5. CONSTRUCTION ENTRANCE:

5.1 AT THE START OF SITE WORK, A STONE CONSTRUCTION ENTRANCE SHALL BE INSTALLED AT THE ACCESS TO THE SITE FROM THE ACCESS EASEMENT DRIVEWAY TO CONTROL THE TRACKING OF MUD OFF THE SITE. THE ENTRANCE SHALL BE MAINTAINED UNTIL THE SITE IS IN A STABILIZED CONDITION WHEN THE POSSIBILITY OF VEHICLES TRACKING MUD OFF SITE HAS BEEN ELIMINATED.

5.2 THE CONTRACTOR SHALL SWEEP THE ADJACENT ROADWAYS WHEN MUD, DUST, DIRT, DEBRIS, ETC. HAS SHOWN SIGNS OF BUILD UP ON ROADWAYS AROUND THE SITE. THE CONTRACTOR SHALL PAY PARTICULAR ATTENTION TO THIS MATTER AND IMMEDIATE ATTENTION IS ALWAYS REQUIRED.

6. DEWATERING OF EXCAVATIONS:

6.1 DISCHARGE FROM DEWATERING PUMPS OR TEMPORARY TRENCH OR EXCAVATION DRAINS SHALL NOT BE DISCHARGED DIRECTLY TO THE ON-SITE DRAINAGE SYSTEM, WETLANDS, OR SEWAGE DISPOSAL SYSTEM. DISCHARGES SHALL BE DIRECTED TO A TREATMENT SYSTEM CONSISTING OF A SEDIMENT BASIN, STRAW BALE SEDIMENT BASIN, FILTER BAG SYSTEM OR OTHER APPROVED METHOD TO FILTER THE DISCHARGE WATER AND PREVENT EROSION.

6.2 ALL DEWATERING DRAINS ASSOCIATED WITH CONSTRUCTION ACTIVITIES SHALL COMPLY WITH THE TOWN OF SHERBORN REQUIREMENTS, UNITED STATES ENVIRONMENTAL PROTECTION AGENCY, MASSACHUSETTS DEP AND OTHER APPROPRIATE AGENCIES. UNDER NO CIRCUMSTANCE SHALL DEWATERING DRAINAGE BE DISCHARGED INTO SANITARY SEWER.

7. SOIL STOCKPILES:

7.1 STOCKPILES OF SOIL MATERIALS SHALL BE PLACED WITHIN AREAS THAT ARE PROTECTED BY PERIMETER EROSION CONTROLS, OR SHALL BE SURROUNDED BY PROPER SILT FENCE OR FIBER LOGS.

7.2 STOCKPILES THAT ARE TO BE IN PLACE FOR EXTENDED PERIODS OF TIME (MORE THAN 30 DAYS) SHALL BE COVERED OR OTHERWISE TEMPORARILY STABILIZED IN ACCORDANCE WITH BEST MANAGEMENT PRACTICES.


8. CATCH BASIN INLET PROTECTION

8.1 CATCH BASINS AND TRENCH DRAINS WITHIN THE WORK AREA OR THAT WILL RECEIVE RUNOFF FROM THE WORK AREA SHALL BE PROTECTED WITH A SILT SACK OR OTHER APPROVED INSTALLATION TO MINIMIZE THE SEDIMENT LOAD TO THE CATCH BASIN.


9. DUST CONTROL:

9.1 THE CONTRACTOR SHALL TAKE APPROPRIATE MEASURES DURING SITE WORK TO MINIMIZE WIND BLOWN DUST FROM EXPOSED SOIL SURFACES. MEASURES INCLUDE, BUT ARE NOT LIMITED TO:


- SPRINKLING WATER ON EXPOSED SURFACES
- APPLICATION OF TEMPORARY COVER SUCH AS HYDRO MULCH AND TACKIFIER, STRAW MATTING, JUTE NETTING ETC.

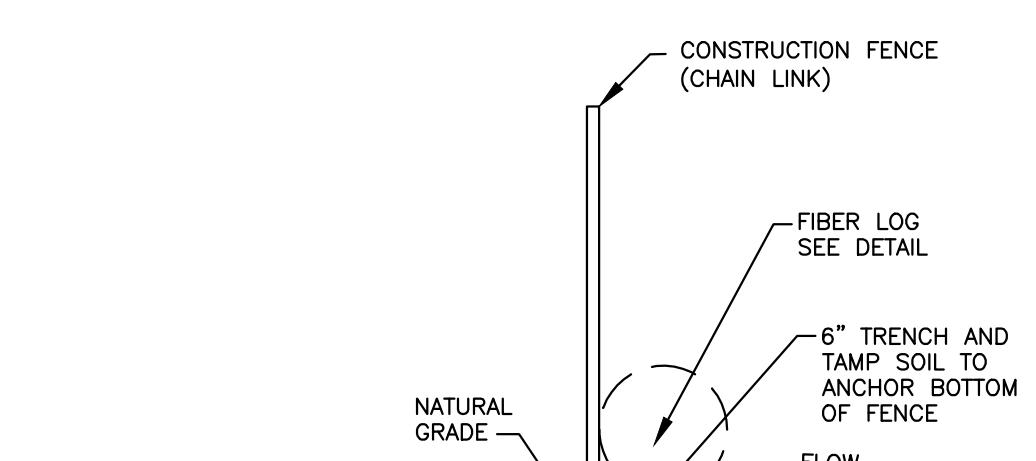

CONSTRUCTION FENCE
WITH FIBER LOG DETAIL
(NO SCALE)

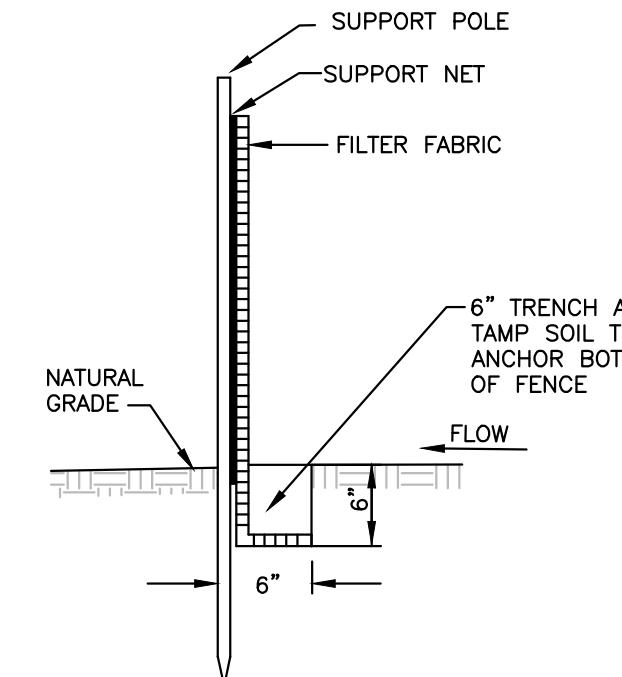



SILT FENCE INSTALLATION
(NO SCALE)

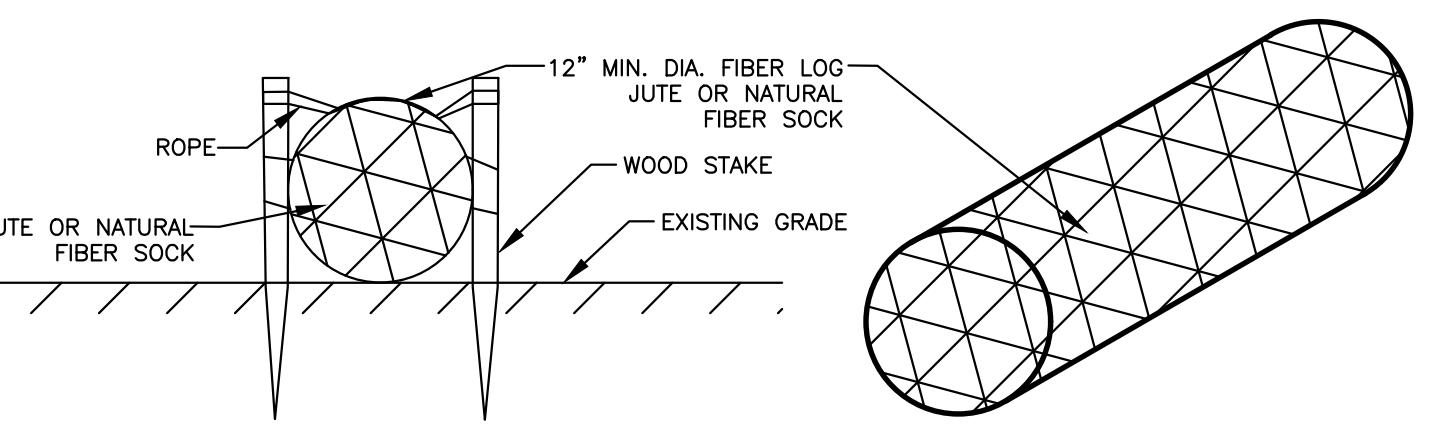

INSTALLATION NOTES FOR FIBER LOGS:

1. LAY THE FIBER LOG AT THE UPHILL BASE OF THE SILT FENCE.
2. INSTALL APPROXIMATELY 4-6 WOOD STAKES THROUGH THE TWINE/NETTING ALONG THE FIBER LOG AS NEEDED TO HOLD THE LOG IN PLACE.
3. DRIVE THE STAKE INTO THE GROUND DEEP ENOUGH TO HOLD THE LOG.
4. IN PAVED AREAS, SECURE FIBER LOG WITH CONCRETE BLOCKS OR SAND BAGS.
5. THE FILLING OF THE FIBER LOG MAY BE SHREDDED STRAW, COIR, COMPOST OR OTHER APPROVED MATERIAL.
6. FIBER LOG SHALL BE 12 INCHES (MIN) IN DIAMETER UNLESS OTHERWISE NOTED ON THE PLANS.

SEDIMENT BARRIER (FIBER LOG)
(NO SCALE)

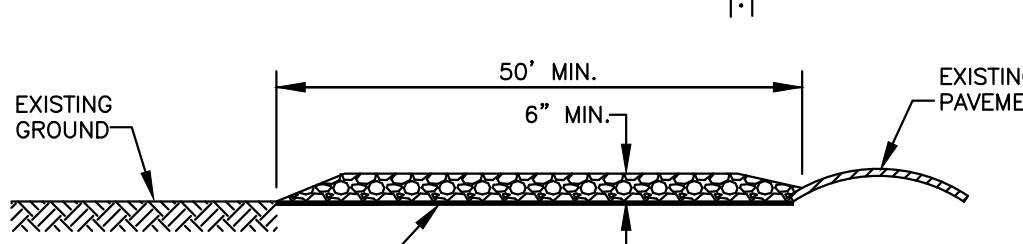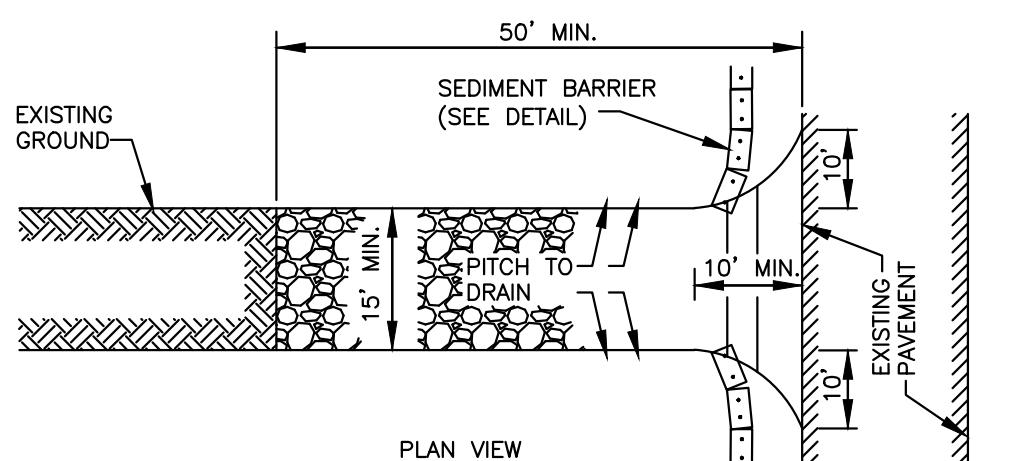


CONSTRUCTION SPECIFICATIONS:

1. STONE SIZE - USE 1 1/2" TO 3 1/2" WASHED, ANGULAR STONE.
2. THICKNESS - NOT LESS THAN SIX (6) INCHES.
3. WIDTH - FIFTEEN (15) FEET MINIMUM, BUT NOT LESS THAN THE FULL WIDTH AT POINTS WHERE INGRESS OR EGRESS OCCURS.
4. FILTER FABRIC - SHALL BE PLACED OVER THE ENTIRE AREA PRIOR TO PLACING OF STONE. USE MIRAFI HF-370 OR EQUAL.
5. MAINTENANCE - THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION WHICH SHALL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHTS-OF-WAY. THIS MAY REQUIRE PERIODIC SPREADING WITH ADDITIONAL STONE AS CONDITIONS WARRANT, AND REPAIR OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT. ALL SEDIMENT SPILLED, DROPPED, WASHED OR TRACKED ONTO PUBLIC RIGHTS-OF-WAY MUST BE REMOVED IMMEDIATELY.
6. PERIODIC INSPECTION AND NEEDED MAINTENANCE SHALL BE PROVIDED.

STONE TRACKING PAD (CONSTRUCTION ENTRANCE)
(NO SCALE)



SILT SACK DETAIL
(NO SCALE)

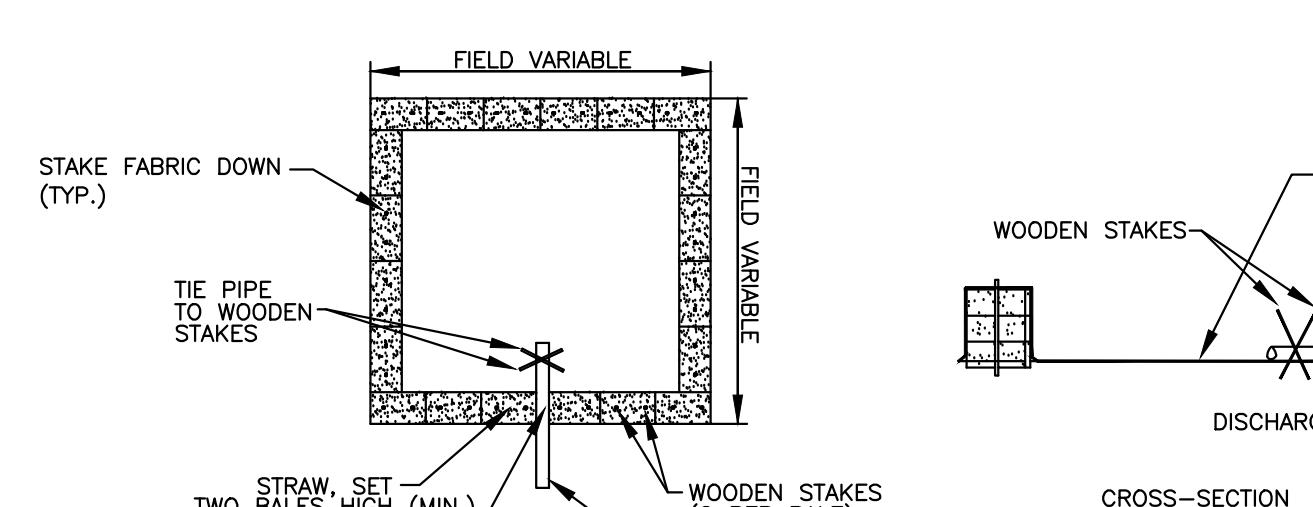

NOTE: NUMBER OF BALES MAY VARY DEPENDING ON SITE CONDITIONS

PLAN VIEW

DEWATERING OF EXCAVATIONS NOTES:

1. DISCHARGE FROM DEWATERING PUMPS OR TEMPORARY TRENCH OR EXCAVATION DRAINS SHALL NOT BE DISCHARGED DIRECTLY TO WETLAND RESOURCE AREAS, ON-SITE SUBSURFACE SEWAGE DISPOSAL SYSTEM, OR EXISTING/PROPOSED DRAINAGE SYSTEMS. THE DISCHARGES SHALL BE DIRECTED INTO A CONSTRUCTED SEDIMENT BASIN OR A STRAW BALE SETTLING BASIN.

STRAW BALE SETTLING BASIN
(NO SCALE)

