

F25889

## **PUMP DESIGN CALCULATIONS**

**for the**

### **BRUSH HILL HOMES**

**at**

**34 BRUSH HILL ROAD IN  
SHERBORN, MASSACHUSETTS 01770**

Prepared By:      DGT Associates  
                          1071 Worcester Road  
                          Framingham, MA 01701



December 23, 2024

# Pump Design Calculations

## Brush Hill Homes

### **Total Daily Flow (Title 5):**

Buildings Use: Single Family Dwellings  
Number of Bedrooms: 12 Bedrooms  
Design Flow – Title 5: 110 GPD / Bedroom  
Total Daily Design Flow: 1,320 Gallons

### **Pump Chamber Volume / Vertical Ft:**

Volume/ft = 11.50 ft x 5.50 ft x 1 ft x 7.48 gal/ft<sup>3</sup>  
Volume/ft = 474 gallons/ft

### **Dose:**

At a minimum, each dose shall clear the force main of the volume contained within.

Line Volume = 18.77 gallons/100 ft x 293 ft of Force Main = 55 gallons

Design at 6 doses/day: 1,320 gallons ÷ 6 = 220 gallons/dose

Total Minimum Dose = 220 + 55 = 275 gallons/dose

### **Draw Depth:**

Design Draw Depth = 275 gallons/dose / 474 gallons/ft = 0.58 ft/dose

Use 0.60 ft = 284.4 gallons/dose

284.4 > 275 ← Okay

### **Storage Above Alarm:**

Storage Volume = (Tank Volume in gal/ft) x (Invert In Elev – Alarm On Float Elev)

Storage Volume = 361 gal/ft x (213.90 – 210.90) ft = 474 gal/ft x 2.40' = 1,422 gallons

1,422 gallons ÷ 1,320 gpd = 1.08 days (25.9 hours)

### **Pump Run Time:**

Pump operates at 36 gal/min

Pump Run Time = 284.4 gal ÷ 36 gal/min

Pump Run Time = 7.9 minutes

**TABLE 1**  
**LINE VOLUMES IN GALLONS/100 FEET OF PIPE LENGTH**

Pipe Size	SDR-26 PVC	SDR-21 PVC	Sch.40 PVC
1 1/4 inch	9.57	9.13	7.76
1 1/2 inch	12.55	11.97	10.57
2 inch	19.64	18.77	17.44
2 1/2 inch	28.65	27.68	24.91
3 inch	42.55	40.92	38.39
4 inch	70.39	67.47	66.12
6 inch	152.6	146.23	150
8 inch	258	248.11	n.a.

**Job No.:** F25889

**Date:** 2024-12-23

## Head Loss in Force Main

### STATIC HEAD (H<sub>s</sub>)

Discharge elev at D-Box	218.70
Pump off elevation	210.10
Total =	8.60

### DYNAMIC HEAD

Pipe Length = 293.0 Ft

Pump Station:

Component	Pipe Size	Quantity	Equiv. Length	Total Equiv. Length
Check Valve	2"	1.0	13.0	13.0
90 deg. Elbow	2"	2.0	5.0	10.0
Tee (side out.)	2"	1.0	11.0	11.0
Ball Valve	2"	2.0	1.2	2.4
		Total =		36.4

Force Main:

Component	Pipe Size	Quantity	Equiv. Length	Total Equiv. Length
45 deg. Elbow	2"	4.0	3.8	15.2
22.5 deg. Elbow	2"	2.0	1.9	3.8
		Total =		19.0

Total Equivalent Pipe Length = 348.4 Ft (TEPL)

JOB No.: F25889

Date: 12/23/2024

## Total Dynamic Head Calculations 2" SDR-21 PVC PIPE

Total Equivalent Pipe Length = 348.4 (TEPL)  
Static Head = 8.60 (H<sub>s</sub>)

Flow GPM	V (ft / sec.)	A $V^2 / 2g$ (ft)	B H <sub>f</sub> / 100 ft	C H <sub>s</sub> (ft)	A+B+C= TDH (ft)
10	0.87	0.01	0.19	0.68	8.60 9.29
15	1.30	0.03	0.40	1.40	8.60 10.03
20	1.74	0.05	0.68	2.35	8.60 11.00
25	2.17	0.07	1.01	3.52	8.60 12.19
30	2.61	0.11	1.41	4.91	8.60 13.62
35	3.05	0.14	1.69	5.89	8.60 14.63
40	3.48	0.19	2.43	8.47	8.60 17.25
45	3.91	0.24	3.00	10.45	8.60 19.29

JOB No.: F25889

Date: 12/23/2024

## Total Dynamic Head Calculations 2" SDR-21 PVC PIPE

Total Equivalent Pipe Length = 348.4 (TEPL)  
Static Head = 8.60 (H<sub>s</sub>)

Flow GPM	V (ft / sec.)	A $V^2 / 2g$ (ft)	B H <sub>f</sub> / 100 ft	C H <sub>s</sub> (ft)	A+B+C= TDH (ft)
40	3.48	0.19	2.43	8.47	8.60 17.25
45	3.91	0.24	3.00	10.45	8.60 19.29
50	4.35	0.29	3.65	12.72	8.60 21.61
60	5.22	0.42	5.16	17.98	8.60 27.00
70	6.10	0.58	6.91	24.07	8.60 33.25
80	6.96	0.75	8.97	31.25	8.60 40.60
90	7.83	0.95	11.15	38.85	8.60 48.40



# WS\_B Series

## Model 3886

SUBMERSIBLE SEWAGE PUMP



### FEATURES

**Impeller:** Cast iron, semi-open, dynamically balanced, non-clog with pump out vanes for mechanical seal protection. Optional Silicon bronze impeller available.

**Casing:** Cast iron volute type for maximum efficiency. Designed for easy installation on A10-20 guide rail or base elbow rail systems.

**Mechanical Seal:** SILICON CARBIDE VS. SILICON CARBIDE sealing faces for superior abrasive resistance, stainless steel metal parts, BUNA-N elastomers.

**Shaft:** Corrosion-resistant stainless steel. Threaded design. Locknut on all models to guard against component damage on accidental reverse rotation.

**Fasteners:** 300 series stainless steel.

Capable of running dry without damage to components.

Designed for continuous operation when fully submerged.

**EXTENDED WARRANTY AVAILABLE FOR RESIDENTIAL APPLICATIONS.**

### AGENCY LISTINGS



Tested to UL 778 and CSA 22.2 108 Standards  
By Canadian Standards Association  
File #LR38549

### APPLICATIONS

Specifically designed for the following uses:

- Homes
- Sewage systems
- Dewatering/Effluent
- Water transfer

### SPECIFICATIONS

#### Pump

- Solids handling capabilities: 2" maximum
- Discharge size: 2" NPT
- Capacities: up to 185 GPM
- Total heads: up to 38 feet TDH
- Temperature: 104°F (40°C) continuous, 140°F (60°C) intermittent

#### MOTORS

- Fully submerged in high grade turbine oil for lubrication and efficient heat transfer. All ratings are within the working limits of the motor.
- Class B insulation

#### Single phase (60 Hz):


- All single phase models feature capacitor start motors for maximum starting torque.
- Built-in overload with automatic reset.
- SJTOW or STOW severe duty oil and water resistant power cords.
- $\frac{1}{3}$  - 1 HP models have NEMA three prong grounding plugs.

#### Three phase (60 Hz):

- Class 10 overload protection must be provided in separately ordered starter unit.
- STOW power cords all have bare lead cord ends.
- **Bearings:** Upper and lower heavy duty ball bearing construction.
- **Designed for Continuous Operation:** Pump ratings are within the motor manufacturer's recommended working limits, can be operated continuously without damage when fully submerged.
- **Power Cable:** Severe duty rated, oil and water resistant. Epoxy seal on motor end provides secondary moisture barrier in case of outer jacket damage and to prevent oil wicking. Standard cord is 20'. Optional lengths are available.
- **Motor Cover O-ring:** Assures positive sealing against contaminants and oil leakage.

## MODELS

Order Number	HP	Phase	Volts	RPM	Impeller Diameter (in.)	Maximum Amps	Locked Rotor Amps	KVA Code	Full Load Efficiency	Resistance		Weight (lbs.)
										Start	Line-Line	
WS0311B	0.33	1	115	1750	4.69	10.7	30.0	M	54	11.9	1.7	63
WS0318B			208			6.8	19.5	K	51	9.1	4.2	
WS0312B			230			4.9	14.1	L	53	14.5	8.0	
WS0511B			115			14.5	31.1	J	55	9.3	1.4	
WS0518B		3	208		5.00	8.0	19.5	K	51	9.1	4.2	
WS0512B			230			7.3	16.5	J	54	11.7	5.6	
WS0538B			200			3.8	12.3	K	75	NA	6.7	
WS0532B			230			3.3	9.7	K	75	NA	9.9	
WS0534B			460			1.7	4.9	K	75	NA	39.4	
WS0537B			575			1.4	4.3	K	68	NA	47.8	
WS0718B	0.75	1	208		5.38	11.0	39.0	K	65	2.6	1.4	85
WS0712B			230			9.4	24.8	J	57	4.8	2.3	
WS0738B			200			4.1	21.2	H	74	NA	4.3	
WS0732B			230			3.6	17.3	J	76	NA	5.6	
WS0734B		3	460			1.8	8.9	J	76	NA	22.4	
WS0737B			575			1.5	7.3	J	71	NA	29.2	
WS1018B		1	208			14.0	39.0	K	65	2.6	1.4	
WS1012B			230			12.3	30.5	H	60	4.3	1.8	
WS1038B			200			6.0	21.2	H	74	NA	4.3	
WS1032B			230			5.8	17.3	J	76	NA	5.6	
WS1034B			460			2.9	8.9	J	76	NA	22.4	
WS1037B			575			2.4	7.3	J	71	NA	29.2	

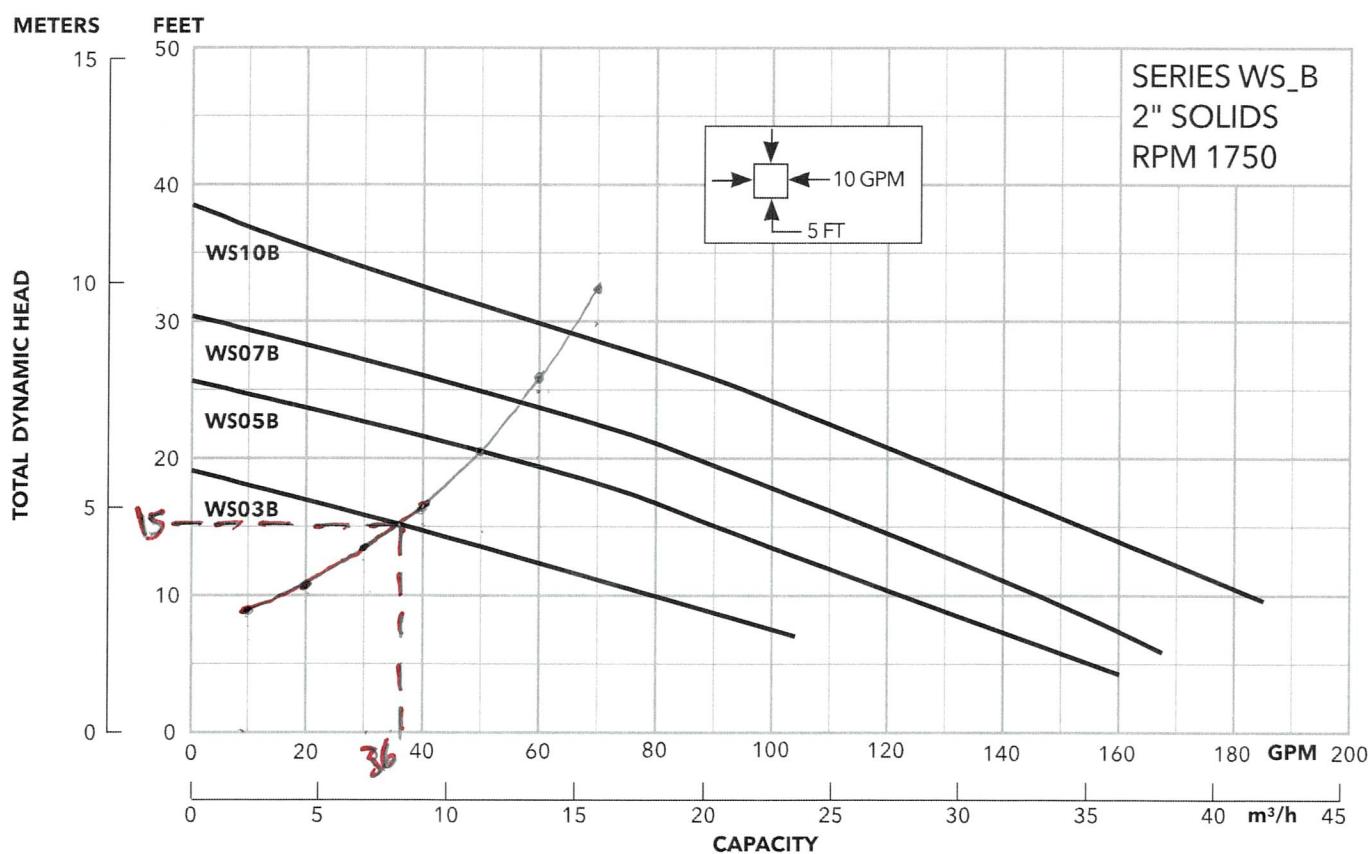

## PERFORMANCE RATINGS (gallons per minute)



Order No.	WS03B	WS05B	WS07B	WS10B
HP ▶	1/3	1/2	3/4	1
RPM ▶	1750	1750	1750	1750
Total Head Feet of Water	10 ▶	80	122	145
	15	36	90	116
	20	-	50	86
	25	-	-	48
	30	-	-	-
	35	-	-	20

## COMPONENTS (for reference only)

Item No.	Description
1	Impeller
2	Casing
3	Mechanical Seal
4	Motor Shaft
5	Motor
6	Ball Bearings
7	Power Cable
8	Casing O-Ring

## DIMENSIONS

(All dimensions are in inches. Do not use for construction purposes.)

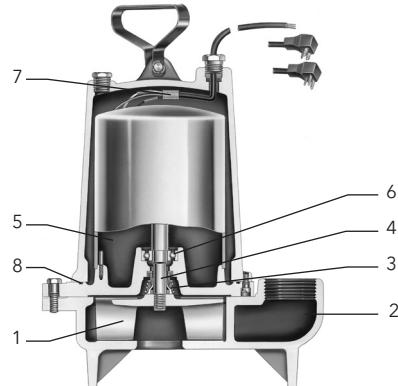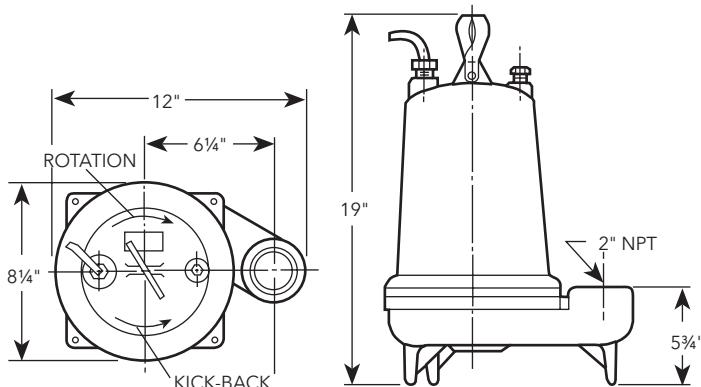

NOTE: For specific parts breakdown, see repair parts.



Xylem Inc.  
2881 East Bayard Street Ext., Suite A  
Seneca Falls, NY 13148  
Phone: (866) 325-4210  
Fax: (888) 322-5877  
[www.gouldswatertechnology.com](http://www.gouldswatertechnology.com)

Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.  
© 2016 Xylem Inc. B3886 R2 September 2016